

# PRESSURE STEAMER HOT/COLD/STEAM - NATURAL GAS, L.P. or OIL HEATED, ELECTRIC

## STATIONARY MOUNTED

#### Ready to Work when you are:

No need to fill fuel tanks or hunt down a water supply when machine is directly plumbed into natural gas and water lines. The pressure washer can be housed indoors, away from the elements, while installing wash stations remotely outdoors.

#### Clean and Efficient Heating System:

24v automatic, electronic ignition on low emission natural gas burner. Liquid Propane conversion option or diesel heated option is available on any model.

#### SpiraLast™ Coil:

The coil is a Hydro Tek manufactured SpiraLast™ heating coil. Robotically fused 1/2" schedule 80 steel pipe is cold rolled to protect the steel pipe from fatigue and the spiral coil is then surrounded by ceramic insulation and stainless enclosure with double-wall end caps. Ask your dealer about the Lifetime Coil Warranty.

#### Belt Driven pump:

Low RPM drive - cooler, quieter, continuous duty performance. These industrial triplex pumps feature ceramic plungers for long life. EZ Align™ pump rail system for belt tensioning with a simple adjustment bolt.

#### **NEMA4 Water Tight Electrical Box:**

ETL certified to UL1776 Class 2 for use in wash-down area, exceeds industry standards. Special Hydro Tek control box features easy to use controls and provides instant access to electronics. Standard diagnostic indicators ensure optimal system performance. Dual voltage switch on most 230v models allows you to simply flip a switch to change to 208v power supply.

#### Bypass Cool System:

Worry free pump cooling system prevents pump from overheating with system designed pump bypass feature.

#### Durable Frame Construction:

Welded, powder coated steel, pro-tect-it frame for durability with rustproof stainless coil wrap and front panels. Forklift slots and overhead lifting points to safely reposition machine. Frame integrated hold down tabs. Stainless steel frame option as well as an option for a removable, stainless back panel available.

#### Best in Class accessibility:


Easy-remove panels on an open frame design with open backside gives you full access to all components, including EZ Align™ belt tensioning system, electrical box, and burner igniter for efficient preventative maintenance checks.

#### More Standard Features:

- Detergent flow metering at full pressure
- Heavy duty industrial motor with standard thermal overload protection.
- Adjustable temperature up to 250°F with steam setting on most models
- Burst disc technology for operator safety.
- Rustproof float tank to regulate incoming water ensuring consistent system performance.
- Heavy duty hose, wand and trigger gun with quick connect nozzles
- Hose reel mounting area on frame allowing for convenient hose storage
- Remote ready: Choose an on/off timer remote option or a full function remote option for complete control from the wash site



2353 Almond Ave. Redlands. CA 92374 phone 800.274.9376 or 1.909.799.9222 www.hydrotek.us fax 909.799.9888 HN Series 1/16 Hydro Tek ©

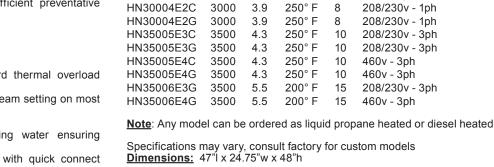

Model

HN20004E2G

HN25004E2G

HN25004E3G

HN25004E4G

#### **Optional Accessories:**

Machine mount hose reel, additional wash station remotes, draft diverter, fullfeature wall mount remote, 30-min shut off timer, hour meter, downstream soap injection, stainless steel frame, stainless back panel kit

### **DISTRIBUTED BY:**

PSI

2000

2500

2500

2500

GPM Temp.

3.9

3.8

3.8

3.8

250° F

250° F

250° F

250° F

**HP** Voltage

5

6.5

7.5

7.5

8

8

10

10

10

10

15

15

208/230v - 1ph

208/230v - 3ph

208/230v - 1ph

208/230v - 1ph

208/230v - 3ph

208/230v - 3ph

208/230v - 3ph

230v - 1ph

460v - 3ph

460v - 3ph

460v - 3ph

460v - 3ph

YDRO TEK US

Washe



Specifications





in	ί