## LANDA®

Industrial Pressure Washers
...Built Right to Do the Job Right

Since 1969

## PGA

Portable, Belt-Drive, Aluminum Chassis, Gasoline-Powered, Cold-Water Pressure Washer

- Up to 3.7 GPM, 3,500 PSI
- Belt-Drive Landa Pump has 7-Year Warranty
- Reliable Honda Engine
- E-Z Pull Starting
- Lightweight, Corrosion Resistant. Aluminum Frame



■ Two **Spring-Loaded Rubber** 

Pad Feet absorb vibration for

long life and to keep the unit

from "walking."

■ Weldless Aluminum Chassis with handles made of 1¼-inch tubing is light, but durable, and is more corrosion resistant than steel.

www.landa.com

### Industrial Pressure Washers ...Built Right to Do the Job Right


Industrial Pressure Washers

Since 1969

# PGA

Portable, Belt-Drive, Aluminum Chassis, Gasoline-Powered, Cold-Water Pressure Washer

- Up to 3.7 GPM, 3,500 PSI
- Belt-Drive Landa Pump has 7-Year Warranty
- Reliable Honda Engine
- E-Z Pull Starting
- Lightweight, Corrosion Resistant, Aluminum Frame

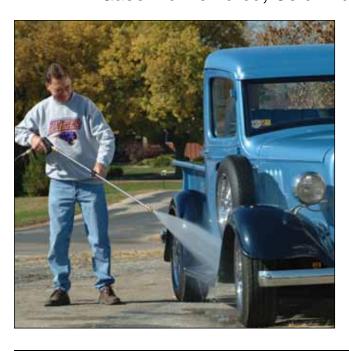

#### WHY CHOOSE LANDA'S PGA

The PGA is Landa's aluminum frame, belt-drive, cold-water pressure washer line offering cleaning power of up to 3,500 PSI at 3.7 GPM. The PGA is easy to transport, as well as push or pull around, thanks to the innovative frame construction and ideal weight distribution.

QUALITY: Only the highest quality components are used on the PGA, including a tri-plunger, high-pressure Landa pump with 7-year warranty, industrial-duty Honda engines with 3-year warranty, durable weldless aluminum frame, and point-and-shoot wand with side grip for operator comfort. The PGA is certified to the rigid UL-1776 safety standards with a 24-inch hose guard for burst protection and pictogram operating instructions for owner liability assurance.

CONVENIENCE: A number of features make the PGA especially popular with users who need to transport equipment to a cleaning site. For instance, the rustfree aluminum frame makes the PGA much lighter to lift into a vehicle; handles on both front and back make for easier loading; and the cast aluminum rotary joints allow the main handle to fold down making the PGA more compact. The PGA is easy to maneuver around the cleaning site with tubed pneumatic tires and an ergonomic handle height. Shock-absorbing rubber feet keep the PGA from "walking" while in operation. The E-Z start valve (on models with 389cc engine) allows for resistance-free pull starting of the engine.

PGA Specifications										
Model No.	Part No.	GPM	PSI	Engine	Start	Pump	Pump RPM	Hose	L x W x H*	Ship Wt.
PGA3-27324	1.107-127.0	2.5	2700	196cc Honda GX200	Recoil	Landa Triplex	1650	3/8" x 50'	45.9" x 26" x 39.7"	196 lbs.
PGA4-35324	1.107-128.0	3.7	3500	389cc Honda GX390	Recoil	Landa Triplex	1200	3/8" x 50'	49.9" x 27" x 40.6"	249 lbs.

Note: Landa is constantly improving and updating its products. Consequently, pictures, features, and specifications in this brochure may differ slightly from current models. Flow rates and pressure ratings may vary due to variances allowed by manufacturers of our machine components. Landa product performance is certified by the Cleaning Equipment Trade Association (CETA) to be within 5% of listed specifications. Listed engine ratings are as provided by the engine manufacturer.

Distributed by:

#### **ACCESSORIES:**

Part No.	Description
9.802-225.0	Detergent Injector Kit
9.302-242.0	Legacy Revolution Turbo Nozzle (PGA3-27324)
9.302-243.0	Legacy Revolution Turbo Nozzle (PGA4-35324)
8.903-606.0	Landa Water Jet Surface Cleaner
8.739-026.0	50-ft. 4000 PSI Tuff-Skin Hose

www.landa.com

<sup>\*</sup> PGA height with handle folded down for transport or storage is 28.5 inches